

READY BOOSTER

THE NEW SINGLE POINT LUBRICATOR



www.ntn-snr.com



With You

From NTN-SNR



READY BOOSTER BENEFITS

- Significant savings due to the flexibility of use (1-12 months and stoppable)
- Suitable for tight and restricted areas (125 cm³)
- Ready to use: no assembly and no tools required
- Only one lubricator for all of your applications: inside and outside (-20°C up to 60°C)
- IP68 protection class: Reliable lubrication even in extremely moist and dusty areas

APPLICATIONS

Due to its compact size, the Ready Booster can be used in various applications:

- Bearings, Plummer blocks
- Chains
- Electrical motors, fans, pumps, conveyors, etc.



ATEX CERTIFIED



II 1G Ex ia IIC T6
II 1D Ex iaD 20 T85°C
I M1 Ex ia I

> **FOR YOUR APPLICATION,**
COMBINE THE MOST SUITABLE GREASE WITH THE BEST AUTOMATIC LUBRICATOR



UNIVERSAL +



HEAVY DUTY +



VIB



HIGH TEMP



FOOD



FOOD CHAIN OIL



CHAIN OIL

DESCRIPTION

General purpose grease for industrial use.	Suitable for very high loads, compatible with many applications, intended for arduous applications.	Parts subject to extensive vibrations or impacts. For high-load applications in humid environments.	This grease is ideal for long-term lubrication at high temperatures up to +150°C. Accepts peaks of +175°C.	Multi-purpose grease for the food and pharmaceutical industries. Complies with NSF-H1 recommendations.	Food-grade oil for chains designed for the food-processing and pharmaceutical industry. Complying with NSF-H1 recommendations.	Synthetic oil for high temperature chains.
--	---	---	--	--	--	--

APPLICATIONS

Agricultural equipment, handling equipment, general mechanical devices, low-power electric motors, etc.	Heavy industry: metallurgy, construction, transport, conveyors, lifting devices, water pumps, etc.	Quarries, cement works, public works and humid environments: paper works, boring, crushers, vibrating scalpels, etc.	Textile machines, paper transformation machines, hot fans, dryers, water pumps, etc.	Bottling machines, dairy equipment, industrial baking, pasta manufacturing, confectionery, slaughterhouses, etc.	Straight, bevel and worm gearing, main bearings, pivots, articulations as well as for the lubrication of lifting, drive and transmission chains even at low temperatures.	Textile and plastic materials transformation machines: for all types of chains.
---	--	--	--	--	---	---

TECHNICAL DATA

Soap	Lithium Calcium	Lithium	Lithium Calcium	Polyurea	Aluminium complex	•	•
Oil	Mineral	Mineral	Semi-synthetic	Semi-synthetic	Paraffinic mineral	Ester + Pao	Ester + PAO
Operating temperature	-30°C/+130°C	-30°C/+150°C	-20°C/+140°C	-40°C/+160°C	-30°C/+120°C	-30°C/ +120°C	-20°C/+250°C
Viscosity at 40°C	220 cSt	150 cSt	360 cSt	160 cSt	195 cSt	220 cSt	320 cSt


TECHNICAL INFORMATION

- Gas generating unit
- Reliable and economical
- Transparent cartridge
- Immediate activation (less than 1 day)

IP68 protection
Max. pressure 5 bars
Discharge period from 1 to 12 months
Stoppable
Capacity of 125 cm³
Operating temperatures: from -20°C up to +60°C
Several accessories available

More information on our range

www.ntn-snr.com

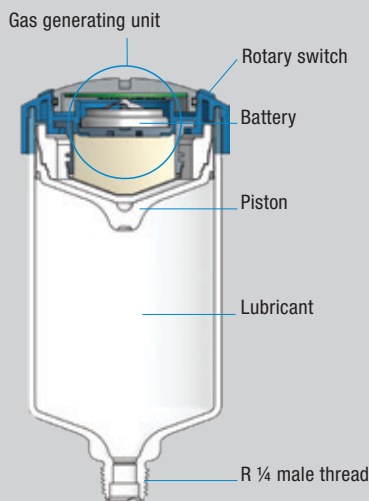

Oil-filled units with integrated oil retaining valve (red plug)



Rotary switch for discharge period setting